

MS4 - MAESTRO SERVER DATA SHEET

The MS4 Maestro-Server optimizes automation control and integration, allowing you to enjoy the benefits of **KNX, IoT, (Internet of Things)**, and energy and financial savings, while creating customized, comfortable environments.




Central Functions:

The MS4 - Maestro Server performs all of the central functions: Schedules, Macro, Alarms, and Logic and Control Functions; and also. Maestro is KNXnet/IP enabled, so that technicians can program and monitor KNX devices via the Internet, from remote locations.

GUI:

The Maestro enables the control of Automation systems via remote PCs, tablets and smart phones. The powerful Maestro-Designer software enables the installer to build a user friendly, flexible GUI. The GUI has been specially designed to optimize customization abilities and user experience, allowing the user to customize and program control functions easily.

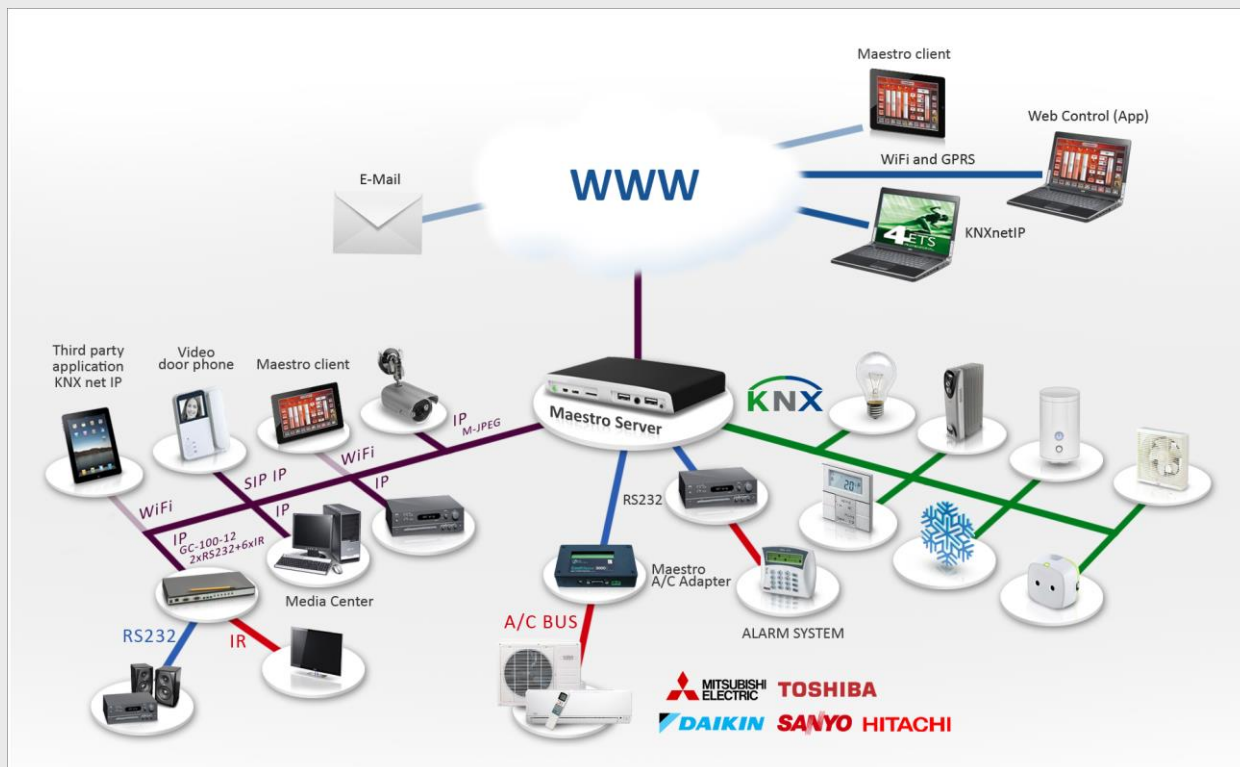

External Interfaces:

Maestro enables connectivity to the KNX system, IP, and RS232 communication port. The external network adapter GC100 enables the extension of control over additional RS232 and IR communication ports.

IoT:

The Maestro Designer software utilizes an advanced protocol generator that enables the implementation of the most complex, two way protocols, enabling the control and interconnection of external devices/systems over the LAN and internet.

MS4 - Maestro Server specifications

Software:

- Scheduling –** Manage daily, weekly, and yearly scheduled events, including sunset and sunrise time based functions.
- Macro/scenes –** Easily activate and set the presets through a friendly interface.
- Client App –** Client App for Android, iOS and Windows. Vivid Graphic User Interface enables the viewing and controlling of lighting, HVAC, shutters, and multimedia from a PC, tablet, and smartphone; over the LAN or the Internet from any location.
- Logical Functions –** Internal Function Blocks Controller - enables the control of highly complex logic and control functions.
- Audio/Video Control –** The Maestro enables control and integration of external systems using common IR, RS232 and IP (IoT) communications. It also acts as a two way KNX gateway to the external systems.
- KNXnet/IP –** The MS4 utilizes the KNXnet/IP protocol enabling remote programming of all of your KNX from ETS at remote location.
- Evolving system –** The Maestro firmware is upgradeable, so it will always remain on the cutting edge of technology.
- Cloud management –** Includes cloud management system enabling easy maintenance, debugging, and firmware upgrades.

Hardware:

Order no.	MS4-1/MAX(unlimited), MS4-1/100(up to 100 Group Addresses), MS4-1/250(up to 250 Group Addresses),MS4-2(unlimited + support of having GUI on local HDMI monitor).
Monitor Interface	HDMI, The monitor can be used for graphic interface under model restrictions
Controls Connectivity	12V DC-in Jack • 10/100 Base-T Ethernet • KNX via USB stick adaptor (included)• USB for mouse • Power button • Power LED • 1 x RS232.
Build	Fan-less and Disk-less implementation for quiet, reliable and energy-efficient operation.
Power	AC/DC adapter, Input: 110-240V AC. Output: 12V DC, 1.5A.
Physical Dimensions	WxHxD 135mm x 21mm x 100mm, Desk Top/Wall Mounting.
Weight	215g.
Operating Environment	Temperature: 0° - 40° C • Humidity: 30% - 90% non-condensing.
Regulatory	CE, FCC.
Parts	MS4 unit • AC/DC Adapter • Bracket* • Mini DB9 adapter cable.

* Optional

These specifications are only for general information and should not be considered as binding specification. CD Innovation reserves the right to make changes and alternations in its products without any notice. MS4-V1